


- *1.NO PCM and PIO_x headed except PIO1
- *2.MCU->bluetooth module: SoftUART(Rx:2;Tx:3);MCU->External: HardUart
- *3.MCU&BT use the same reset
- *4.If work with Stem, Stem must modify the reset pin

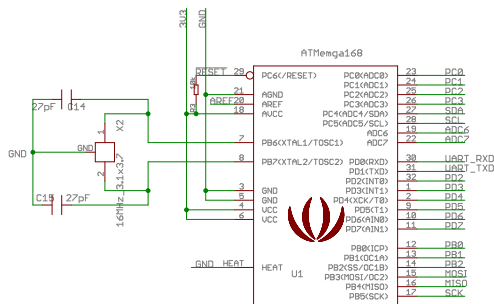

Company: seeedstudio.com	
TITLE: Bluetooth Bee_ Standalone v1.0	
Document Number: 1	REV: 1.0
Date:	Sheet: 1/1